


Pneu-Turn Rotary Actuators

Pneu-Turn Actuators 4.3-4.14

Three-Position Pneu-Turn 4.15-4.17

**Engineering Specifications/
Application Checklist** 4.18-4.21

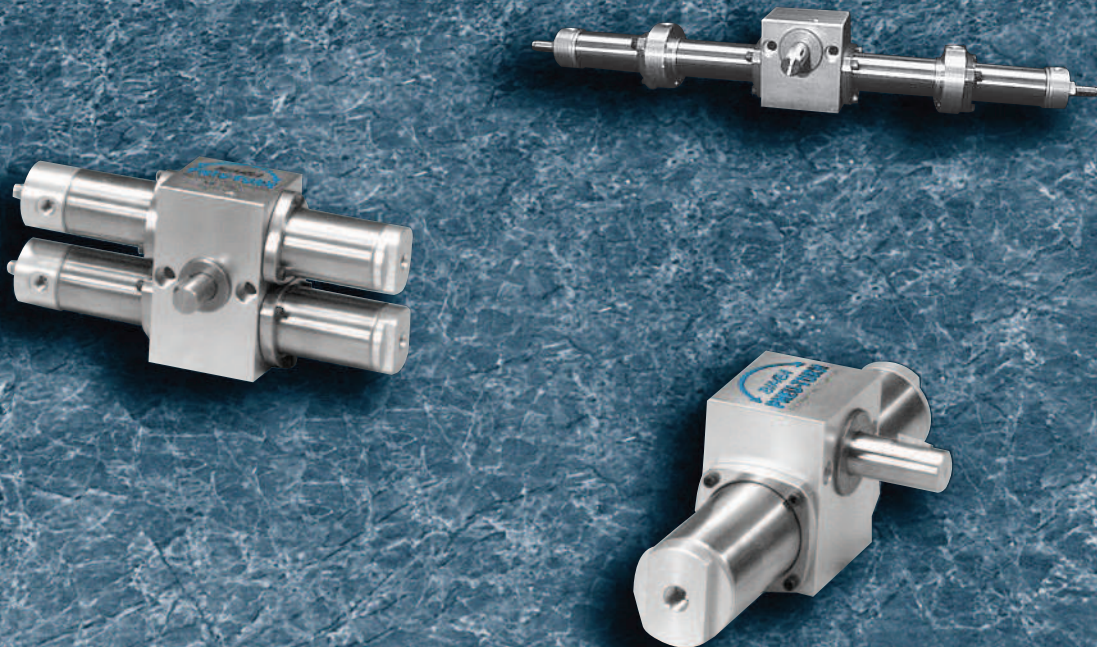


Bimba Pneu-Turn Rotary Actuators



TURN TO THE BIMBA PNEU-TURN® ROTARY ACTUATOR FOR THESE QUALITY FEATURES AT A LOWER COST:

The Bimba Pneu-Turn Rotary Actuator is available with these catalog options:


- Angle Adjustment
- Bumpers
- Adjustable Cushions
- Dual Shaft
- Square Key
- MRS® Magnetic Position Sensing
- Oil Service Seals
- High Temperature Option
- Ball Bearing
- Rear Shaft
- Hardened Shaft
- Anti-backlash Rack

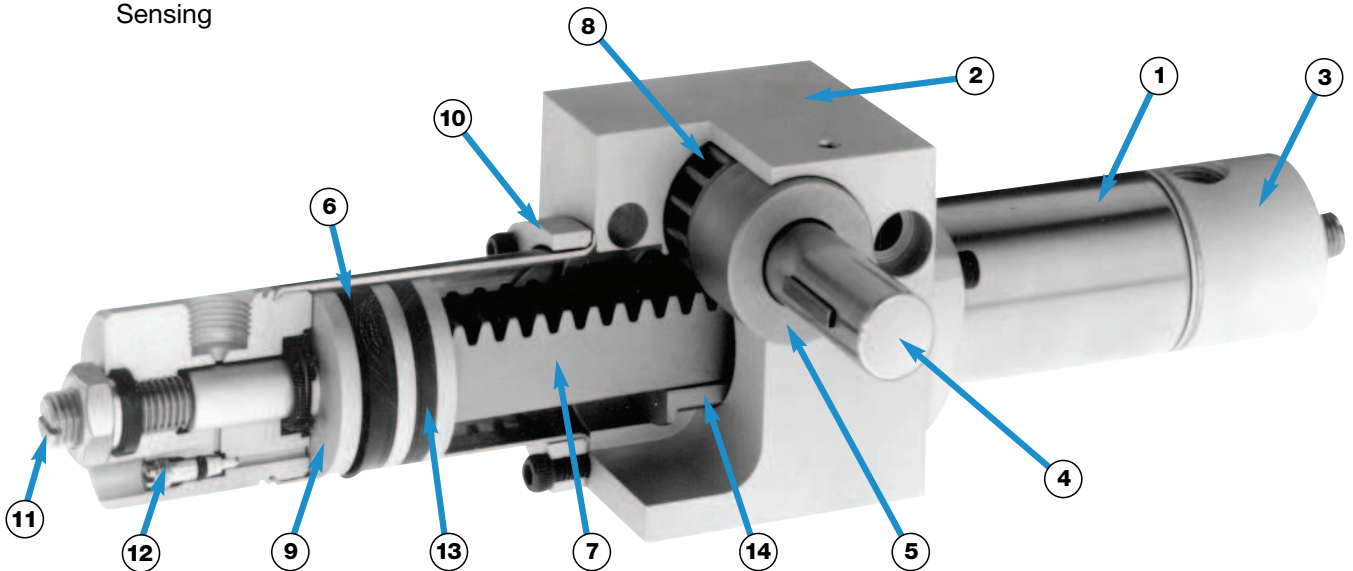

1. **CYLINDER BODIES** – 304 stainless steel for maximum seal life.
2. **ACTUATOR BODY** – High strength, anodized aluminum alloy for maximum corrosion protection.
3. **PORTING ENDS** – High strength, anodized aluminum alloy.
4. **SHAFT** – High strength, 303 stainless steel for maximum wear resistance and long life. (hardened steel optional).
5. **SHAFT BEARINGS** – Self-lubricating, sintered iron copper material for lower friction. (ball bearings optional).
6. **PISTON SEALS** – Buna “N”, U-cup type for low breakaway friction and long life.
7. **RACK** – Carbon steel for maximum wear resistance.
8. **PINION** – High strength, alloy steel for greater durability.
9. **PISTON** – High strength, aluminum alloy.
10. **CYLINDER BODY RETAINER RING** – High strength, stainless steel for maximum corrosion protection.
11. **ANGLE ADJUSTMENT** – An option that allows 45° of adjustability each end.
12. **ADJUSTABLE CUSHIONS** – An option that controls deceleration at the end of the rotation.
13. **MRS® MAGNETIC POSITION SENSING** – An option that provides a magnet for sensing position.
14. **RACK SUPPORT** – Sintered brass material for increased load carrying capabilities.

Bimba Pneu-Turn Rotary Actuators

Three-Position Pneu-Turn




The Three-Position Pneu-Turn rotary actuators, in all bore sizes; both single and double rack can now be ordered as a standard catalog option.

How to Order

The model number for the Three-Position Pneu-Turn consists of alphanumeric characters. They designate the product; bore size, total rotation, degrees to mid-position, position of the shaft key at the mid-rotational position and options. The example below is for a 1-1/2" bore, single rack model with 225 degrees of total rotation, 45 degrees of rotation to the middle position, the key located at mid-position 8 and angle adjustment on both sides.

PT - 098225 / 045-8A1

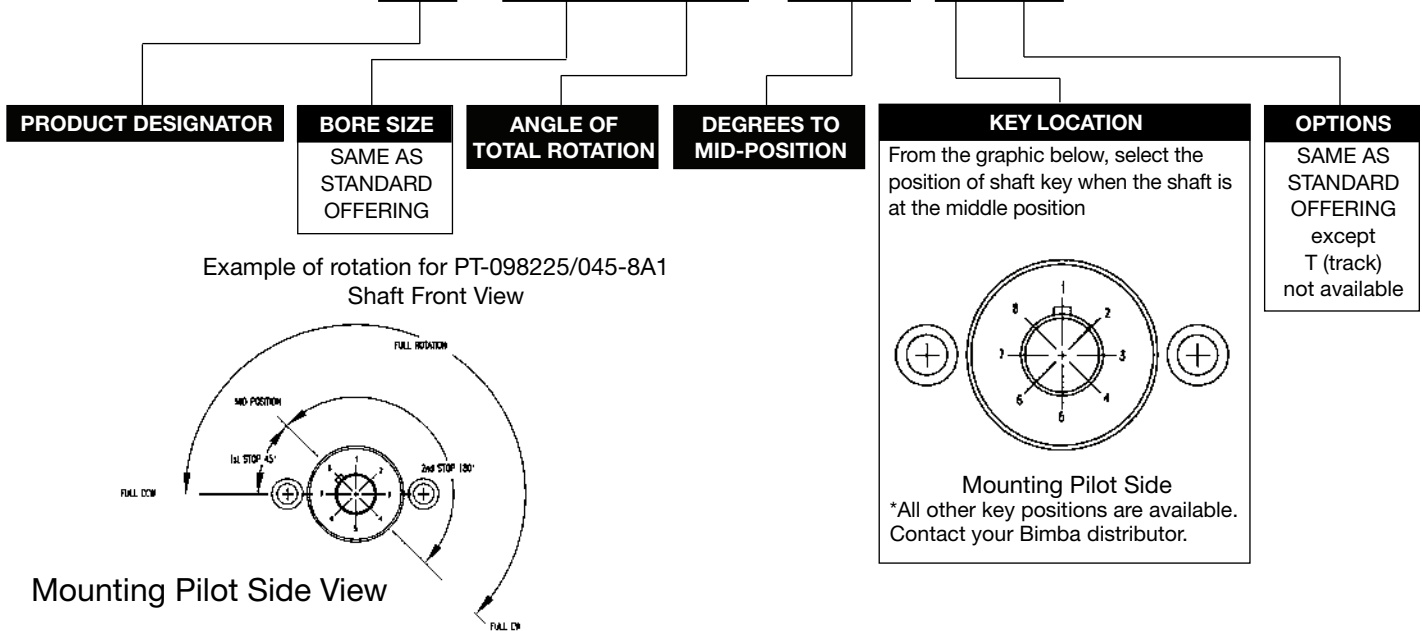

Three-Position List Price Adders

Bore Size	9/16"		3/4"		1-1/16"		1-1/2"		2"	
	Single (006)	Double (014)	Single (017)	Double (033)	Single (037)	Double (074)	Single (098)	Double (196)	Single (247)	Double (494)
Three Position Base Adder										
**Adder per 45 degree Rotation										

**The 45-degree rotational adder shown above includes the base and three-position requirement. No additional rotational adder is required.


Option list prices are the same as the standard offering

Option Series	A	B	C	D	E	F	G	K	M	N	Q	R	S	V	X
9/16" Single	S	N,Q,S	N/A	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,V	N/A	E	A,B,G	N	N/A
9/16" Double	S	N,Q,S	N/A	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,V	N/A	E	A,B,G	N	N/A
3/4" Single	Q,S	C,N,S	B,Q,S	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	A,B,C,G,Q	N	N/A
3/4" Double	Q,S	C,N,S	B,Q,S	E,F	D,F,R	D,E,K	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	A,B,C,G,Q	N	N/A
1-1/16" Single	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
1-1/16" Double	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
1-1/2" Single	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
1-1/2" Double	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
2" Single	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F
2" Double	Q	C,N,S	B,Q,S	E,F	D,F,R,X	D,E,K,X	N,S	F	N	B,G,M,Q,V	A,C,N,S	E	B,C,G,Q	N	E,F

Option T - "Switch track" should only be ordered with options M or V if the actuator will be operated between -20° to 85° C (-4° to 185° F)

Bimba Pneu-Turn Rotary Actuators

Three-Position Pneu-Turn

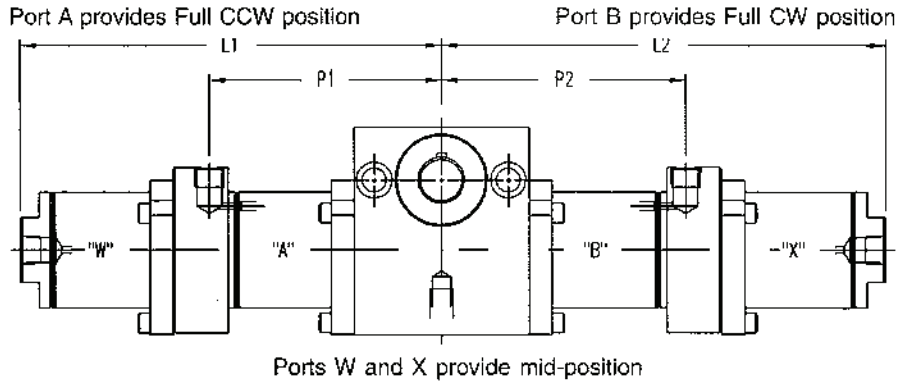

Single Rack Model Dimensions

	9/16" (006)				3/4" (017)				1-1/16" (037)			
	P1	P2	L1	L2	P1	P2	L1	L2	P1	P2	L1	LR
Degrees of Full Rotation	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.
Adder per degree of rotation	0.0048	0.0048	0.0048	0.0048	0.0066	0.0066	0.0066	0.0066	0.0073	0.0073	0.0073	0.0073
Degree of Stop Rotation	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop
Adder per degree of rotation	N/A	N/A	0.0048	0.0048	N/A	N/A	0.0066	0.0066	N/A	N/A	0.0073	0.0073
Base Unit (No Option)	1.41	1.41	2.82	2.82	1.63	1.63	3.05	3.05	2.03	2.03	3.89	3.89
Bumpers Both Sides (B1)	1.53	1.53	3.06	3.06	1.77	1.77	3.33	3.33	2.18	2.18	4.19	4.19
Bumper CCW Side (B2)	1.41	1.53	2.82	3.06	1.63	1.77	3.05	3.33	2.03	2.18	3.89	4.19
Bumper CW Side (B3)	1.53	1.41	3.06	2.82	1.77	1.63	3.33	3.05	2.18	2.03	4.19	3.89
Cushion/Flow Both Sides (C1) (Q1)	N/A	N/A	N/A	N/A	1.63	1.63	3.58	3.58	2.03	2.03	4.51	4.51
Cushion/Flow CCW Side (C2) (Q2)	N/A	N/A	N/A	N/A	1.63	1.63	3.05	3.58	2.03	2.03	3.89	4.51
Cushion/Flow CW Side (C3) (Q3)	N/A	N/A	N/A	N/A	1.63	1.63	3.58	3.05	2.03	2.03	4.51	3.89
Angle Adjustment Both Sides (A1)	1.41	1.41	3.05	3.05	1.63	1.63	3.27	3.27	2.03	2.30	4.28	4.28
Angle Adjustment CCW Side (A2)	1.41	1.41	2.82	3.05	1.63	1.63	3.05	3.27	2.03	2.03	3.89	4.28
Angle Adjustment CW Side (A3)	1.41	1.41	3.05	2.82	1.63	1.63	3.27	3.05	2.03	2.03	4.28	3.89

**Select Magnetic Position Sensing adder from MRS table

	1-1/2" (098)				2" (247)			
	P1	P2	L1	L2	P1	P2	L1	L2
Degrees of Full Rotation	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.
Adder per degree of rotation	0.0097	0.0097	0.0097	0.0097	0.0137	0.0137	0.0137	0.0137
Degree of Stop Rotation	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop	2nd stop	1st stop
Adder per degree of rotation	N/A	N/A	0.0097	0.0097	N/A	N/A	0.0137	0.0137
Base Unit (No Option)	2.28	2.28	4.39	4.39	2.81	2.81	5.13	5.13
Bumpers Both Sides (B1)	2.43	2.43	4.69	4.69	3.01	3.01	5.53	5.53
Bumper CCW Side (B2)	2.28	2.43	4.39	4.69	2.81	3.01	5.13	5.53
Bumper CW Side (B3)	2.43	2.28	4.69	4.39	3.01	2.81	5.53	5.13
Cushion/Flow Both Sides (C1) (Q1)	2.28	2.28	5.03	5.03	2.81	2.81	5.95	5.95
Cushion/Flow CCW Side (C2) (Q2)	2.28	2.28	4.39	5.03	2.81	2.81	5.13	5.95
Cushion/Flow CW Side (C3) (Q3)	2.28	2.28	5.03	4.39	2.81	2.81	5.95	5.13
Angle Adjustment Both Sides (A1)	2.28	2.28	4.80	4.80	2.81	2.81	5.66	5.66
Angle Adjustment CCW Side (A2)	2.28	2.28	4.39	4.80	2.81	2.81	5.13	5.66
Angle Adjustment CW Side (A3)	2.28	2.28	4.80	4.39	2.81	2.81	5.66	5.13

**Select Magnetic Position Sensing adder from MRS table


MRS Length Adder (in.)					
Total Rotation Degrees	006/014	017/033	037/074	098/196	247/494
45°	0.66	0.66	0.75	0.75	0.75
90°	0.55	0.52	0.59	0.53	0.44
180°	0.34	0.22	0.26	0.09	0.00
270°	0.12	0.00	0.00	0.00	0.00
360°	0.00	0.00	0.00	0.00	0.00

Note:
Overall length calculator spreadsheet available. Contact the Technical Assistance Center for details.

Single rack overall width calculation: PT-098180/045-8C1--Using the chart above, calculate L1 and L2 dimensions as follows:
 $L1 = \text{Total rotation } (180) * (.0097) \text{ Full rotation adder} + \text{Degrees to 2nd stop } (135) * (.0097) \text{ 2nd stop rotation adder} + \text{Cushion adder } (5.03)$
 $L2 = \text{Total rotation } (180) * (.0097) \text{ Full rotation adder} + \text{Degrees to 1st stop } (45) * (.0097) \text{ 1st stop rotation adder} + \text{Cushion adder } (5.03)$
 $[L1 = (1.746" + 1.310" + 5.03") = 8.086"] + [L2 = (1.746" + .437 + 5.03") = 7.213"]; \text{ Total width} = 8.086" + 7.213" = 15.30"$

Bimba Pneu-Turn Rotary Actuators

Three-Position Pneu-Turn

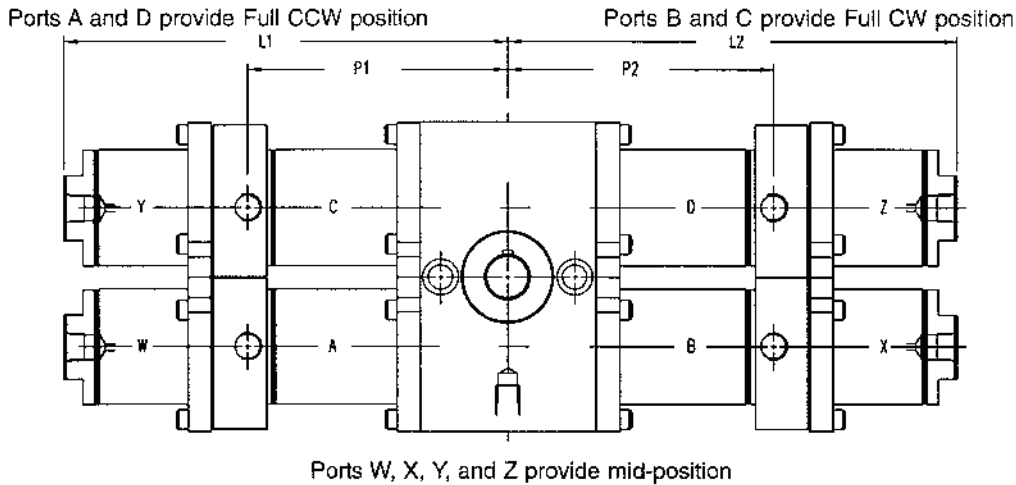

Double Rack Model Dimensions

	9/16" (014)				3/4" (033)				1-1/16" (074)			
	P1	P2	L1	L2	P1	P2	L1	L2	P1	P2	L1	LR
Degrees of Full Rotation	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.
Adder per degree of rotation	0.0048	0.0048	0.0048	0.0048	0.0066	0.0066	0.0066	0.0066	0.0073	0.0073	0.0073	0.0073
*Degrees to longest stop	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.
Adder per degree of rotation	N/A	N/A	0.0048	0.0048	N/A	N/A	0.0066	0.0066	N/A	N/A	0.0073	0.0073
Base Unit (No Option)	1.41	1.46	2.82	2.87	1.63	1.68	3.05	3.10	2.03	2.08	3.89	3.94
Bumpers Both Sides (B1)	1.53	1.46	3.06	2.87	1.77	1.68	3.33	3.10	2.18	2.08	4.19	3.94
Bumper CCW Side (B2)	1.53	1.46	3.06	2.87	1.77	1.68	3.33	3.10	2.18	2.08	4.19	3.94
Bumper CW Side (B3)	1.53	1.46	3.06	2.87	1.77	1.68	3.33	3.10	2.18	2.08	4.19	3.94
Cushion/Flow Both Sides (C1) (Q1)	N/A	N/A	N/A	N/A	1.63	1.68	3.58	3.10	2.03	2.08	4.51	3.94
Cushion/Flow CCW Side (C2) (Q2)	N/A	N/A	N/A	N/A	1.63	1.68	3.58	3.10	2.03	2.08	4.51	3.94
Cushion/Flow CW Side (C3) (Q3)	N/A	N/A	N/A	N/A	1.63	1.68	3.58	3.10	2.03	2.08	4.51	3.94
Angle Adjustment Both Sides (A1)	1.41	1.46	3.05	2.87	1.63	1.68	3.27	3.10	2.03	2.08	4.28	3.94
Angle Adjustment CCW Side (A2)	1.41	1.46	3.05	2.87	1.63	1.68	3.27	3.10	2.03	2.08	4.28	3.94
Angle Adjustment CW Side (A3)	1.41	1.46	3.05	2.87	1.63	1.68	3.27	3.10	2.03	2.08	4.28	3.94

**Select Magnetic Position Sensing adder from MRS table

	1-1/2" (196)				2" (494)			
	P1	P2	L1	L2	P1	P2	L1	L2
Degrees of Full Rotation	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.	full rot.
Adder per degree of rotation	0.0097	0.0097	0.0097	0.0097	0.0137	0.0137	0.0137	0.0137
Degree of Stop Rotation	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.	stop rot.
Adder per degree of rotation	N/A	N/A	0.0097	0.0097	N/A	N/A	0.0137	0.017
Base Unit (No Option)	2.28	2.33	4.39	4.44	2.81	2.86	5.13	5.18
Bumpers Both Sides (B1)	2.43	2.33	4.69	4.44	3.01	2.86	5.53	5.18
Bumper CCW Side (B2)	2.43	2.33	4.69	4.44	3.01	2.86	5.53	5.18
Bumper CW Side (B3)	2.43	2.33	4.69	4.44	3.01	2.86	5.53	5.18
Cushion/Flow Both Sides (C1) (Q1)	2.28	2.33	5.03	4.44	2.81	2.86	5.95	5.18
Cushion/Flow CCW Side (C2) (Q2)	2.28	2.33	5.03	4.44	2.81	2.86	5.95	5.18
Cushion/Flow CW Side (C3) (Q3)	2.28	2.33	5.03	4.44	2.81	2.86	5.95	5.18
Angle Adjustment Both Sides (A1)	2.28	2.33	4.80	4.44	2.81	2.86	5.66	5.18
Angle Adjustment CCW Side (A2)	2.28	2.33	4.80	4.44	2.81	2.86	5.66	5.18
Angle Adjustment CW Side (A3)	2.28	2.33	4.80	4.44	2.81	2.86	5.66	5.18

**Select Magnetic Position Sensing adder from MRS table

Note:

Overall length calculator spreadsheet available. Contact the Technical Assistance Center for details.

Double rack overall width calculation: PT-196180/045-8C1--Using the chart above, calculate L1 and L2 dimensions as follows:

L1 = Total rotation (180) * (.0097) Full rotation adder + Largest Degrees stop (135) * (.0097) stop rotation adder + Cushion adder (5.03")

L2 = Total rotation (180) * (.0097) Full rotation adder + Largest Degrees stop (135) * (.0097) stop rotation adder + Cushion adder (4.44")

[L1 = (1.746" + 1.310" + 5.03") = 8.086"] + [L2 = (1.746" + 1.310" + 4.44") = 7.496"]; Total width = 8.086" + 7.496" = 15.58"

**Notes - Largest stop rotation is used for double rack models to calculate overall L1 and L2 length. Double rack models - one body on each side will be shorter if the shaft mid-position is not 1/2 of the total rotation, the above calculation still provides the units overall width.